

Specifications

Processor	CPU	Intel J1900/ Gen Celeron 3865U/Core 6th 7th i3/i5/i7 /Android	
	Cooling System	Fanless	
	Memory	4GB/8GB DDR3	
	Storage	mSATA SSD	
	I/O Ports		USB: 4*USB2.0,optional 6*USB(4*USB2.0+2*USB3.0)
			COM: 2*RS232, optional 4*RS232
			Display: 1*VGA/1*HDMI
			Audio: 1*Line_Out、 1*Line_In
	Expansion: 1*MINI-PCIE		
Network(LAN)	2*10/100/1000Mbps Ethernet		
Input Voltage	Input Voltage	12V DC(Aviation Connector)	
LCD Display	Display Type:	12.1Inch a-Si TFT-LCD Panel(LED Backlight)	
	Max. Resolution:	1280x800 / 16:10	
	Luminance(cd/m ²)	400 cd/m ²	
Touch screen	Touch Type	Capacitive Touch	
OS Support	OS Support	Microsoft Windows 7/ 8/ 10/ Linux	
Environment	Operating Temperature	-10°C~60°C(14~ 140 °F)(extend temperature optional)	
	Storage Temperature	-20°C~70°C(-4 ~ 158 °F)	
	Front Panel Protection	IP65 compliant	
Mechanical	Dimensions	296.4*198.5*66.9mm	
	Color	Black/Silvery/Gray	
	Material	Aluminum + SUS/Sheet Metal	
	N.W.	3.0Kg	
Custom Service	Custom Service	Custom BIOS, System Encryption, Custom LOGO	


Pictures

Fodenn

Fodenn



Dimensions

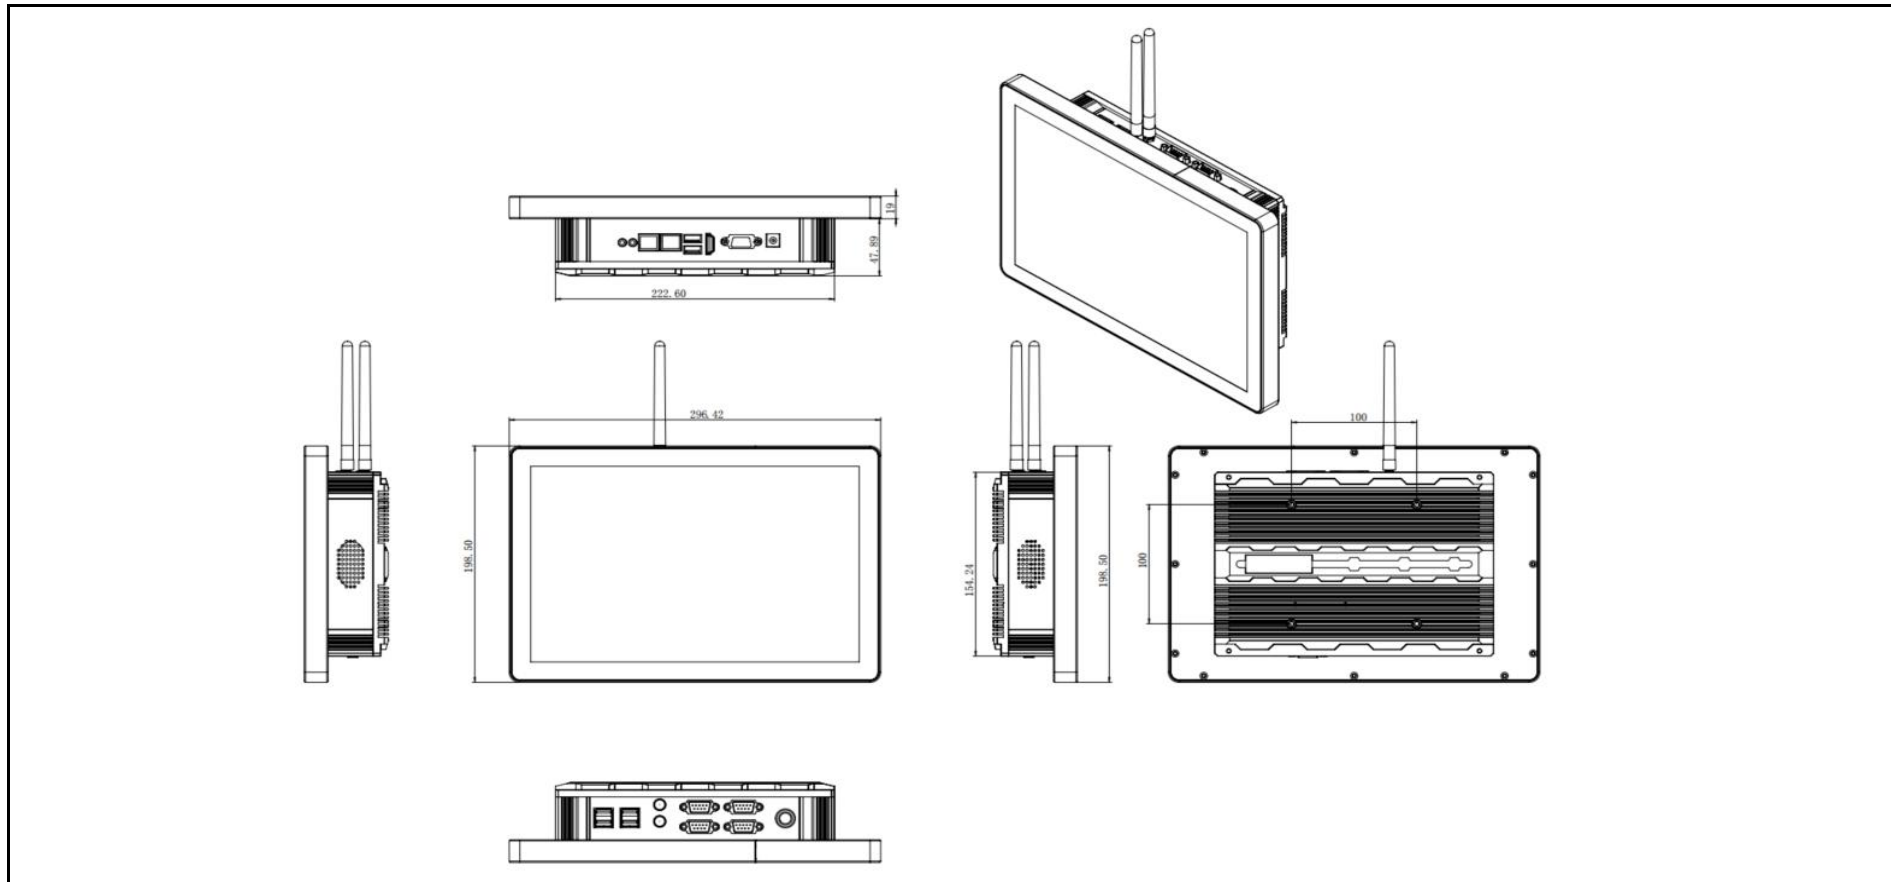

Application Scenarios

The equipment is suitable for hotels, restaurants, hospitals, shops, office buildings, companies and so on, can be used for information release, network wireless payment and so on.....

Packing List	1*IPC-HC1312、 1*Drive CD、 1*Power Adpter(InputL180-240VAC,OutPut:DC12V 5A)、 1* Desiccant
Optional Annex	VESA Bracket
Ordering Information	Projected Capacitive Touch Version
Operating Systems	WIN7/WIN8/WIN10 32bit 64bit ENG/CN、 LINUX